




EN50131-2-6 GR3 CL III

- Complies with EN50131-2-6
- Flush-mounting
- Suitable for doors and windows of any material
- Wire connection
- With anti-tampering wire loop

Series 424

Housing material	Brass
Operation	Reed contact with NC output with near magnet
Type of connection	Wires (2 for contact, 2 for anti-tamper) for TF models
Operating temperature	-25°C to +50°C
Protection rating	IP 65
Standard equipment	Anti-tampering wires

Dimensions

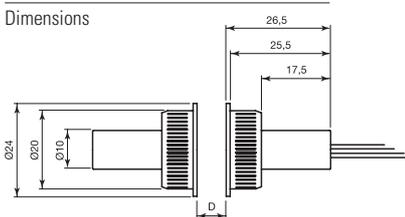

Series 424

Magnetic contact for armoured doors

Brass magnetic contact for flush mounting into window frame.

It is suitable for any kind of door/window, even ferromagnetic material (iron).

Thanks to a special knurling, the contact sticks perfectly where necessary. Typical applications include: armoured doors, iron doors and gates.

It is pressure mounted into a 20 mm diameter hole. The reed section contains a tightly sealed reed with epoxy resin and an anti-tampering loop to reduce any risk of intrusion.

Wired connection.

Order codes

Code	D max (no iron)	D max (on iron)	Connection type	Max voltage	Max current	Max power	N° wires	Cable length	Safety grade	Environmental class	Package weight
424-TF	20 mm	12 mm	NC*	42.4 V _{peak} - 60 V DC	1 A	10 W	4	1.2 m	3	III	0.18 Kg

"Safety grade" and "Environmental Class" as per European Standard EN 50131-1

D max: maximum installation distance. For other operating distances, see the instructions sheet at www.coopercsa.it

* With near magnet