

EASYLINE

PRE-CONFIGURED READERS & CREDENTIALS

RFID, NFC & BLUETOOTH® TECHNOLOGIES



BENEFITS

- Plug & Play - No configuration required
- Fully interoperable with existing access control systems
- Secure contactless identification using cards, keyfobs or mobile phones
- Cost-effective solution



13.56 MHz



BLUETOOTH®



CONTACTLESS



WIEGAND



RESISTANCE

EQ, IP65



UP TO

1K10

Easyline readers and credentials make access control effortless without compromising security.

PLUG & PLAY

The reader's Wiegand output easily interfaces with most existing Wiegand protocol access control panels (W26, W32 or 37 bits).

No configuration is required to install the readers and use the credentials.

EASY TO INSTALL

Easyline readers deliver ease of installation for indoor or outdoor environments:

- Removable terminal block & connector
- Compatible with European and American back boxes
- Mounting on any surface, including metal, concrete, brick, etc.

MULTI-TECHNOLOGIES

Easyline is compatible with many technologies* and makes it easy to manage extensions, upgrades and technology migrations.

Bluetooth® Low Energy and NFC

Make your access control both secure and much more intuitive with our touchless identification options. The reader allows for the use of virtual-cards. Smartphones are used as access keys, doing away with all the constraints of traditional access.

125 kHz Prox

STid offers multi-technology readers able to manage many Prox credentials: EM®, HID Proximity®, INDALA® 27 bits, AWID® and IOPROX®.

WELCOME TO HIGH SECURITY

Easyline offers enhanced security through data encryption and mutual authentication between the card and reader. It uses the latest MIFARE® DESFire® EV2 contactless chip technologies with new data security mechanisms:

- **Secure Messaging EV2:** secure transaction method based on AES-128 with protection against interleaving and replay attacks.
- **Proximity Check:** improved protection against relay attacks.

By using security-standard encryption and advanced key management mechanisms, Easyline reduces the risk of duplicated card or compromised data.












*Depending on the reader

DESIGNED & MADE IN FRANCE


WE'VE GOT YOUR BACK



SPECIFICATIONS

	 ARC1	 ARC-A	 ARC-B	 ARC-I	 ARC-J
Standards	ISO14443 type A, ISO18092 (NFC)				
13.56 MHz compatibility	MIFARE® DESFire® EV2 2K				
Bluetooth compatibility	Available in BLE version - Working with STid Mobile ID® App & Free Mobile Credential (37bit or 32bit Wiegand) Random Unique ID provided upon installation of App.				
125 kHz compatibility	NA	NA	NA	SE8 version: HID® Prox, EM® SE8M version: HID® Prox, AWID®, IOProx®, Indala® 27 bits, EM®	
Reading distances*	13.56 MHz: up to 6 cm / 2.36" Bluetooth®: up to 20 m / 65.6 ft	13.56 MHz: up to 8 cm / 3.15" 125 kHz: up to 8 cm / 3.15" Bluetooth®: up to 20 m / 65.6 ft	13.56 MHz: up to 6 cm / 2.36" 125 kHz: up to 8 cm / 3.15" Bluetooth®: up to 20 m / 65.6 ft	13.56 MHz: up to 8 cm / 3.15" 125 kHz: up to 8 cm / 3.15" Bluetooth®: up to 20 m / 65.6 ft	13.56 MHz: up to 6 cm / 2.36" 125 kHz: up to 8 cm / 3.15" Bluetooth®: up to 20 m / 65.6 ft
Communication interfaces	Wiegand 26, 32 & 37 bits				
Connections	3 m / 118.11" plug-in/plug-out connector rugged cable	10-pin plug-in connector (5 mm / 0.2") 2-pin plug-in connector (5 mm / 0.2"); O/C contact - Tamper detection signal			
Data protection	Available in EAL5+ version (secure data storage with certified crypto processor)				
Light indicator	2 RGB LEDs				
Audio indicator	Internal buzzer				
Power requirement (max.)	130 to 150 mA / 12 VDC depending on the version	150 mA / 12 VDC depending on the version	180 mA / 12 VDC depending on the version	180 to 190 mA / 12 VDC depending on the version	190 to 220 mA / 12 VDC depending on the version
Power supply	9 VDC to 15 VDC	7 VDC to 28 VDC			
Material	ABS-PC UL-V0 (black)				
Dimensions (h x w x d)	110 x 42 x 22 mm / 4.33" x 1.65" x 0.86"	107 x 80 x 26 mm / 4.2" x 3.15" x 1.02"		145.64 x 79.93 x 25.7 mm / 5.71" x 3.11" x 0.98"	
Operating temperatures	- 30°C to + 70°C / - 22°F to + 158°F / Humidity: 0 - 95%				
Protection	IP65 Level - Weather-resistant with waterproof electronics (CEI NF EN 61086 homologation)				
Resistance	Reinforced vandal proof structure IK10	Reinforced vandal proof structure IK08	Reinforced vandal proof structure IK10	Reinforced vandal proof structure IK08	
Mounting	Wall, door frame, European mullion flush boxes. Metal surface mount ok without spacer	Compatible with any surfaces and metal walls - Wall mount/Flush mount: - American (metal/plastic) - 83.3 mm / 3.27" - External dimensions: 101.6 x 53.8 x 57.15 mm / 3.98" x 2.09" x 2.24" Examples: Hubbel-Raco 674, Carlon B120A-UP... - European 60 & 62 mm / 2.36" & 2.44"			
Certifications    	CE, FCC and UL				
Part numbers xx: 3i = W26 bits; 3LA = W32 bits; 3V = W37 bits	Standard: ARC1-R31-B/PC2-xx/1 BLE: ARC1S-R31-B/PC2-xx/1	Standard: ARC-R31-A/PC2-xx/1 BLE: ARCS-R31-A/PC2-xx/1	Standard: ARC-R31-B/PC2-xx/1 BLE: ARCS-R31-B/PC2-xx/1	Standard: ARC-RX1-I/PC2-xx/1 BLE: ARCS-RX1-I/PC2-xx/1 Multi 125 kHz chips: ARC-RX1-IM/PC2-xx/1 BLE: ARCS-RX1-IM/PC2-xx/1	Standard: ARC-RX1-J/PC2-xx/1 BLE: ARCS-RX1-J/PC2-xx/1 Multi 125 kHz chips: ARC-RX1-JM/PC2-xx/1 BLE: ARCS-RX1-JM/PC2-xx/1

READY-TO-USE EASYLINE CREDENTIALS

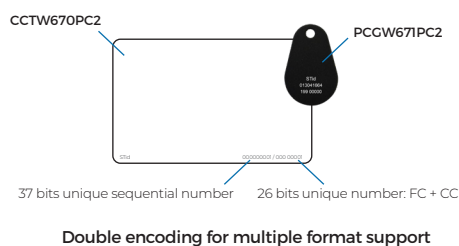

Bluetooth® & NFC smartphones
with STid Mobile ID® App

MANY ACCESSORIES AVAILABLE



Enrollment reader



Spacers, decorative plates and shields

*Caution: information about the distance of communication: measured from the center of the antenna, depending on the type of identifier, size of the identifier, operating environment of the reader, temperatures, power supply voltage and reading functions (secure reading). External interference may reduce reading distances.
Legal: STid, STid Mobile ID® and Architect® are registered trademarks of STid SAS. All trademarks mentioned in this document belong to their respective owners. All rights reserved - This document is the property of STid. STid reserves the right to make changes to this document and to cease marketing its products and services at any time and without notice. Photos are not contractually binding.

Headquarters / EMEA

13850 Créasque, France
Tel.: +33 (0)4 42 12 60 60

PARIS-IDF Office

92290 Châtenay-Malabry, France
Tel.: +33 (0)1 43 50 11 43

STid UK Ltd.

Callows Hill, Warwick CV34 6UW, UK
Tel.: +44 (0) 192 621 7884

NORTH AMERICA Office

Irving, Texas 75063-2670, USA
Tel.: +1 469 524 3442

LATINO AMERICA Office

San Rafael 06470 CDMX, México
Tel.: +521 (55) 5256 4706

info@stid.com

www.stid-security.com