


CODE: **AWO171** v.1.0/1
 NAME: **DSC BOX**

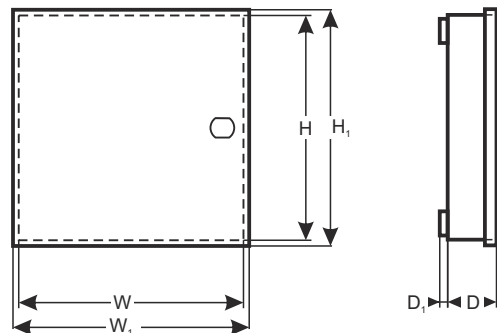

DESTINATION

Power Series Neo - HS2016, HS2016-4, HS2032, HS2064, HS2128
Power Series - PC1616, PC1832, PC1864
Power Series Pro - HS3032, HS3128, HS3248

Modules:

Power Series Neo - HSM2300, HSM2204, HSM2208, HSM2955, HSM2108, PCL-422
Power Series - PC5320, PC5100, PC5108, PC5200, PC5204, PC5400, PC5950, IT-100
Power Series Pro - HSM3408, HSM2108, HSM3204CX, HSM3350, AMX-400, 3G/LE9080 (directly on central's PCB)

Modules with mounting plate:

Power Series Neo - LE2080(R), 3G2080(R), TL280LE(R), TL2803G, TL280(R)E, 3G2080,
Power Series - 3G2060(R), TL2603G(R), TL260(R)

TECHNICAL DATA

External dimensions of the enclosure:	W=280, H=295, D+D1=78+6 [+/-2 mm]
External dimensions of the front panel:	W1=285, H1=300 [+/-2 mm]
Weight net/gross:	2,70kg / 2,85kg [+/-0,1kg]
Battery space:	7Ah/12 V Sealed Lead Acid (SLA)
Transformer:	TRP 40VA/16V/18V in case of PC/ABC in class UL94-V0, IP30
Power supply	230 V (-15%/+10%), 50 Hz; 200 mA (max.)
Power supply output:	U1=16V AC or U2=18V AC (-5%, +15%), I1=2,2 A or I2=2,0 A (max.)
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	enclosure is equipped with set including mounting bracket with tamper
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
Declaration, warranty:	CE, 2 year from the production date