

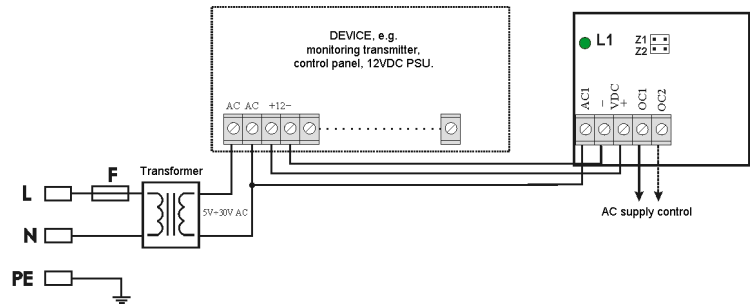


CODE: **AWZ 518** v.1.1/IV  
NAME: **PC2 Timing relay module**

EN\*\*

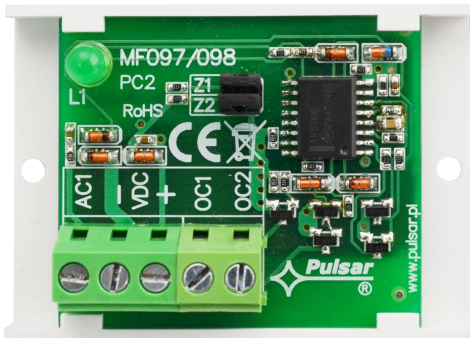

**DESCRIPTION**

The PC2 timing relay module is intended for AC power status control in object alarm systems (monitoring transmitters, alarm control panels, DC power supply units, etc.). The module informs about AC power loss with a preset delay time T and its return. PC2 has two OC outputs (OC1, OC2) and an LED (L1) indicating the device's status. Delay time indicating AC power loss is adjustable via two jumpers – Z1, Z2.

**SPECIFICATIONS**

<b>Supply voltage</b>	10V ÷ 15V DC
<b>Current consumption</b>	5 mA
<b>T delay adjustment range</b>	4s/1min/16min/4h 15min (+/-10%)
<b>AC1 input</b>	0V ÷ 30V AC Inactive input: 0V ÷ 1V AC Active input: 5V ÷ 30V AC GND = 'VDC-' power terminal
<b>Technical outputs:</b> <b>- OC1 output</b>  <b>- OC2 output</b>	OC type 50mA max. <ul style="list-style-type: none"> <li>normal state: L (0V, GND),</li> <li>active state: hi-Z (high impedance)</li> </ul> <ul style="list-style-type: none"> <li>normal state: hi-Z (high impedance)</li> <li>active state: L (0V, GND)</li> </ul>
<b>LED indication</b>	L1 green LED
<b>Operating conditions</b>	II environmental class -10°C ÷ 50°C
<b>Dimensions</b>	L=60, W=43, H=23 [mm, +/-2]
<b>Installation:</b>	A mounting panel with an adhesive tape, mounting screws x2 (holes 3mm)
<b>Connectors</b>	Φ0,41÷1,63 (AWG 26-14)
<b>Net/gross weight</b>	0,03kg /0,05 kg
<b>Declarations, warranty</b>	CE, RoHS, 2 year from the production date