

DS-TVL236-3-5P

Parking Information Guidance Screen



- Support Seven Colors
- Display dynamic arrows, icons, and remaining parking space number
- Equipped with standard RJ45 communication mode



▪ Specification





Display Screen	
Pixel Pitch Category	P5
Pixel Pitch	5 mm
White Balance Brightness	5000 cd/m ²
Color Temperature	8500
Viewing Angle	120° (H)
Brightness Uniformity	≥ 90%
Contrast Ratio	3000 : 1
Color Uniformity	≥ 90%
Display Color	Red, green, yellow
General	
Power Supply	100 to 240 VAC, 50/60 Hz
Average Consumption	100 W
Max. Consumption	600 W
Screen Dimensions (W × H)	480 × 960 mm (18.9 × 37.8 inch)
Dimensions (with Package)	1022 × 542 × 151 mm (40.2 × 21.3 × 5.9 inch)
Screen Weight	40 kg (88.2 lb.)
Weight (with Package)	60 kg (132.3 lb.)
Working Temperature and Humidity	-30 °C to 60 °C (-22 °F to 140 °F), 20% to 90%
Screen Border Material	Metal plate
Lifespan	≥ 50000 h
Protection	IP54

▪ Available Model

DS-TVL236-3-5P

Dimension

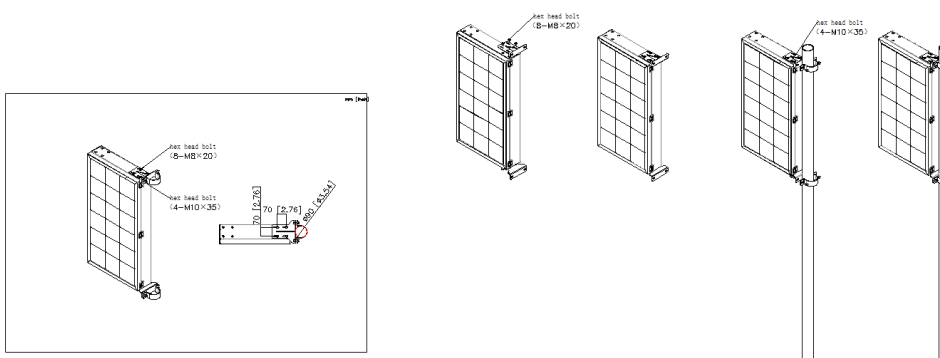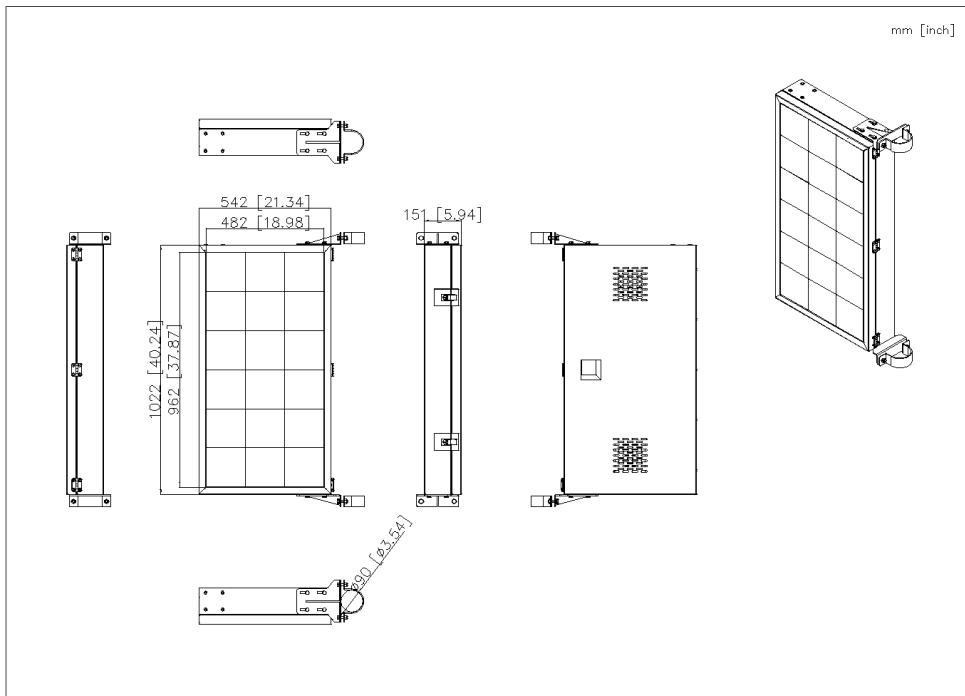

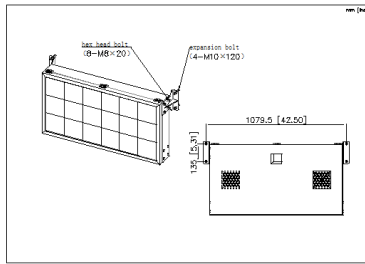

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

