



EXT-POE2

Extender EXT-POE2

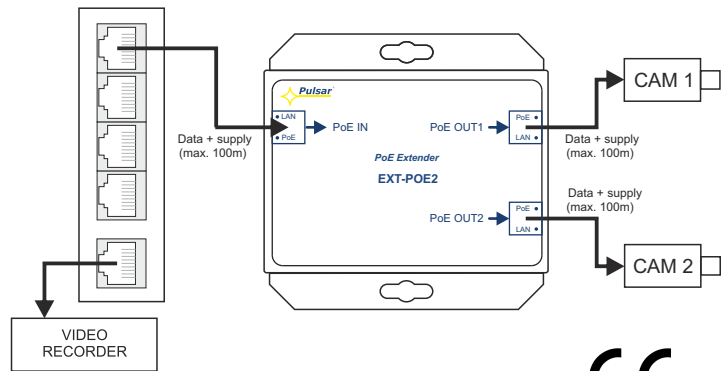

CODE: **EXT-POE2** v1.0/I
 TYPE: **Extender EXT-POE2**

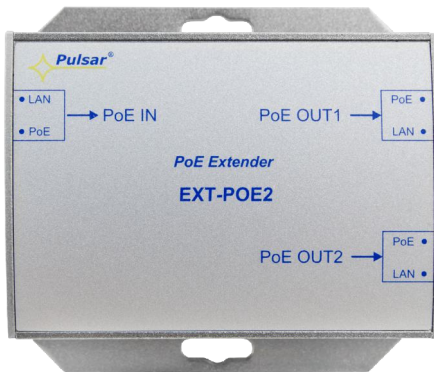

EN



Features of the power supply unit:

- The output voltage range 44-57VDC
- Power from PoE switch
- The PoE IN input compliant with the IEEE 802.3af standard
- The PoE OUT1/2 output compliant with the IEEE 802.3af standard
- Increases Ethernet and PoE power range by 100 meters
- designed for 10Mbit/s and 100Mbit/s network
- LED optical signalization
- protections:
 - surge protection (PoE input)
 - OLP overload protection
 - SCP short circuit protection
- warranty – 2 year from the production date

The **EXT-POE2 extender** is a device designed to increase the PoE and Ethernet range by additional 100 meters using UTP Cat. 5/5e cable. The Extender can be powered using a PoE switch or another PoE-compliant device (PoE IN input). The output voltage and data are available at the PoE OUT1 output designed for connecting cameras or other IP devices using PoE power supply. The maximum load current is 0,4A (0,3A/port). The PoE OUT1 and PoE OUT2 ports are supplied over 4/5 (+) and 7/8 (-) pairs, which, according to the Ethernet standard, are not used for data transmission (data transmission uses 1/2 and 3/6 twisted pairs).

TECHNICAL DATA

Supply voltage	compliant with 802.3af/at (44÷57VDC)
Current consumption by PSU systems	<30mA
Module power	20W max.
Output voltage	compliant with 802.3af
Output current	0,3A/ports ($\Sigma=0,4A$ max.)
The PoE IN input power supply pairs	1/2 (+) 3/6 (-) 4/5 (+) 7/8 (-)
The PoE OUT1/2 output power supply pairs	4/5 (+) 7/8 (-)
Overload protection OLP Short circuit protection SCP	105% ÷ 150% of nominal output current, automatic recovery
LED operation indication	Yellow LAN LED - indicating the LAN connection status Green PoE LED - presence of input/output voltage
Operation conditions	II environmental class, -10°C÷+40°C
Dimensions (LxWxH)	81 x 77 x 26 [mm]
Mounting	mounting screws x2 (holes \varnothing 6mm)
Connectors: - IN/OUT PoE	RJ45 8P8C
Net/gross weight	0,11kg / 0,15kg
Storage temperature	-20°C...+60°C
Declarations, warranty	CE, RoHS, 2 years from the production date