


CODE: **SFG10F8** v1.0/l  
 TYPE: **Optical switch SFG10F8 (8xSFP, 2xRJ45)**

EN\*\*

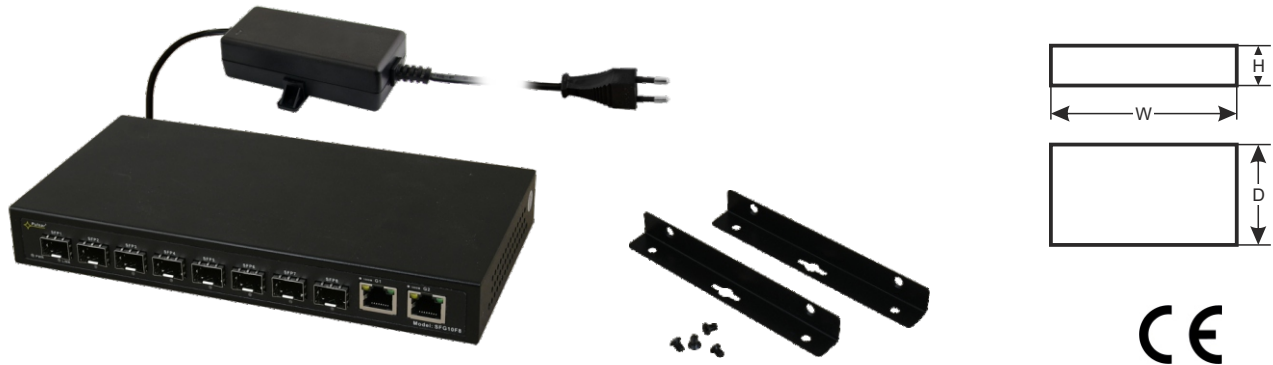

**Features:**

- 10 ports optical switch:  
 8 SFP ports 10/100/1000Mb/s  
 2 ports 10/100/1000Mb/s RJ45
- Supports auto-learning and auto-aging of MAC addresses (8K size)
- Built-in switch mode power supply PSD12020 12 V DC
- Additional mounting elements
- LED indication
- warranty – 2 year from the production date

**DESCRIPTION**

SFG10F8 is 10-port optical switch designed for data transmission over Ethernet via fiber optics and UTP cables. Cat 5e. Switch has 8 SFP sockets (marked SFP1 ÷ SFP8), which after using SFP modules (GBICs) enable fiber optic transmission. G1 and G2 ports are used to connect further network devices through RJ45 socket. The LEDs at the front panel indicate the operation status.

Connectivity via fiber optics cables allows for fast and stable data transmission over long distances, resistant to electromagnetic interference and adverse environmental conditions. It also enables easy expansion of network in future.

**TECHNICAL PARAMETERS**

<b>Ports</b>	10 10/100/1000Mb/s ports (8 x SFP + 2 x RJ45) with connection speed auto-negotiation and MDI/MDIX Auto Cross
<b>Protocols, Standards</b>	IEEE802.3, 802.3u, 802.3x CSMA/CD, TCP/IP
<b>Bandwidth</b>	16Gbps
<b>Transmission method</b>	Store-and-Forward
<b>Optical indication of operation</b>	Switch power supply; Link/Act;
<b>Power supply</b>	~100-240 V; 50/60 Hz; 0,3 A switched mode power supply PSD12020 12 V DC / 2 A / 24 W max.
<b>Operating conditions</b>	temperature -10 °C + 40 °C, relative humidity 5% - 90%, no condensation
<b>External dimensions</b>	W=221, H=29, D=115 [± 2mm]
<b>Additional equipment</b>	surface mounting sheets
<b>Net/gross weight</b>	0,9 / 1,1 kg
<b>Protection class EN 60950-1:2007</b>	II (second)
<b>Storage temperatur</b>	-20 °C + 60 °C
<b>Declarations, warranty</b>	CE, 2 year from the production date

## Connection schemes

