

## iDS-7216HUHI-M2/P TURBO ACUSENSE DVR

### Key Feature

- Deep learning-based motion detection 2.0 for all analog channels
- Deep learning-based perimeter protection
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- HDTVI/AHD/CVI/CVBS/IP video inputs
- Audio via coaxial cable
- Up to 32-ch IP camera inputs (up to 8 MP)
- Up to 10 TB capacity per HDD
- Provide power supply to PoC cameras over coaxial cable



### Compression and Recording

- H.265 Pro+ can be enabled to improve encoding efficiency and reduce data storage costs
- Recording at up to 8 MP resolution

### Storage and Playback

- 2 SATA interfaces
- Smart search for efficient playback

### Smart Function

- Deep learning-based motion detection, and perimeter protection (line crossing and intrusion detection)
- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras

### Network & Ethernet Access

- Compatible with major Wi-Fi dongle products in the market
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Output bandwidth limit configurable



## Specification

<b>Model</b>	<b>iDS-7216HUHI-M2/P</b>
<b>Motion Detection 2.0<sup>1</sup></b>	
<b>Human/Vehicle Analysis</b>	Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights; Quick search by object or event type is supported;
<b>Perimeter Protection<sup>1</sup></b>	
<b>Human/Vehicle Analysis</b>	Up to 4-ch
<b>Recording</b>	
<b>Video compression</b>	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
<b>Encoding resolution</b>	Main stream: 8 MP@8 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N)
	Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N)
<b>Video bitrate</b>	32 Kbps to 10 Mbps
<b>Dual stream</b>	Support
<b>Stream type</b>	Video, Video & Audio
<b>Audio compression</b>	G.711u
<b>Audio bitrate</b>	64 Kbps
<b>Video and Audio</b>	
<b>IP video input<sup>2</sup></b>	8-ch (up to 24-ch)
	Enhanced IP mode on: 16-ch (up to 32-ch), each up to 4 Mbps
	Up to 8 MP resolution Support H.265+/H.265/H.264+/H.264 IP cameras
<b>Analog video input</b>	16-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
<b>PoC camera input</b>	Support Hikvision PoC camera <b>*: PoC access capability see Appendix.</b>
<b>HDTVI input</b>	8 MP@15 fps, 8 MP@12.5 fps, 3K@20 fps, 5 MP@20 fps, 5 MP@12 fps, 4 MP@30 fps, 4 MP@25 fps, 3 MP@18 fps, 1080p@30 fps, 1080p@25 fps, 720p@60 fps, 720p@50 fps, 720p@30 fps, 720p@25 fps
<b>AHD input</b>	5 MP@20 fps, 4 MP@25 fps, 4 MP@30 fps, 1080p@25 fps, 1080p@30 fps, 720p@25 fps, 720p@30 fps
<b>HDCVI input</b>	4 MP@25 fps, 4 MP@30 fps, 1080p@25 fps, 1080p@30 fps, 720p@25 fps, 720p@30 fps
<b>CVBS input</b>	PAL/NTSC
<b>CVBS output</b>	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
<b>VGA output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz
<b>HDMI output</b>	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz

<b>Video output mode</b>	HDMI/VGA simultaneous output
<b>Audio input<sup>3</sup></b>	4-ch, RCA (2.0 Vp-p, 1 K $\Omega$ )
	16-ch via coaxial cable
<b>Audio output</b>	1-ch, RCA (Linear, 1 K $\Omega$ )
<b>Two-way audio</b>	1-ch, RCA (2.0 Vp-p, 1 K $\Omega$ ) (using the audio input)
<b>Synchronous playback</b>	16-ch
<b>Network</b>	
<b>Total bandwidth</b>	128 Mbps
<b>Remote connections</b>	128
<b>Network protocols</b>	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
<b>Network interface</b>	1, RJ45 10/100/1000 Mbps self-adaptive Ethernet interface
<b>Wi-Fi</b>	Connectable to Wi-Fi network by Wi-Fi dongle through USB interface
<b>Auxiliary interface</b>	
<b>SATA</b>	2 SATA interfaces
<b>Capacity</b>	Up to 10 TB capacity for each disk
<b>Serial interface</b>	RS-485 (half-duplex)
<b>USB interface</b>	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
<b>Alarm in/out<sup>3</sup></b>	4/1
<b>General</b>	
<b>Power supply</b>	100 to 240 VAC, 50 to 60 Hz
<b>Consumption</b>	≤ 20 W (without HDD)
<b>Working temperature</b>	-10 °C to +55 °C (+14 °F to +131 °F)
<b>Working humidity</b>	10% to 90%
<b>Dimension (W × D × H)</b>	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)
<b>Weight</b>	≤ 3.8 kg (without HDD, 8.4 lb.)


**Note:**

1: Motion detection 2.0 and perimeter protection cannot be enabled at the same time. Enable one function will make the other one unavailable.

2: Enhanced IP mode might be conflicted with smart events (motion detection 2.0 and perimeter protection) or other functions, please refer to the user manual for details.

3: The number of audio inputs and alarm in/out can be optional. The tag on the package will describe audio input and alarm in/out parameters. For example, “4A+8/4ALM” means your device has 4 audio inputs, 8 alarm inputs and 4 alarm outputs. If your device only has 1 audio input, the tag may not describe it.

## Physical Interface

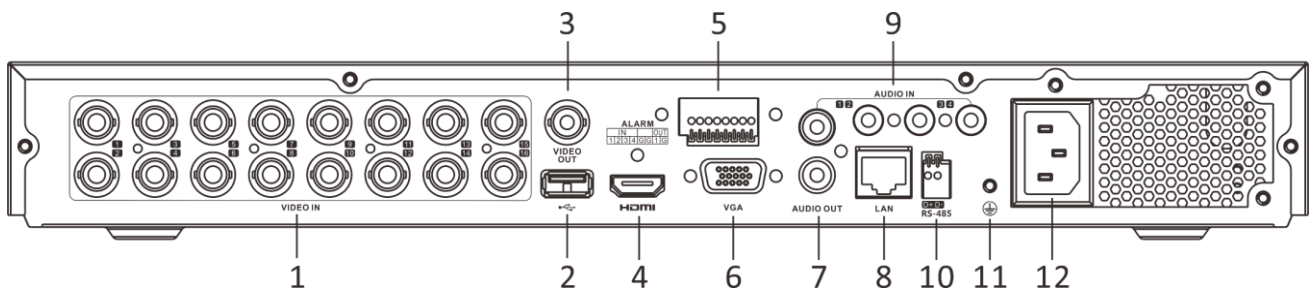

No.	Description	No.	Description
1	Video and Coaxial Audio In	7	AUDIO OUT, RCA connector
2	USB interface	8	LAN network interface
3	VIDEO OUT	9	AUDIO IN, RCA connector
4	HDMI interface	10	RS-485 serial interface
5	ALARM IN/OUT	11	GND
6	VGA interface	12	Power Supply

## Available Model

iDS-7216HUHI-M2/P

## Appendix

### AT/AF Mode

With reference to PoE standards, Hikvision has introduced AT and AF mode for PoC to distinguish the power level of PoC cameras. The maximum operating power of AT and AF are 12 W and 6 W respectively. These two modes are not related to IEEE 802.3 IP standard.

### PoC Access Capability

PoC Device	Allowed AT/AF Camera Access
4-ch PoC device	4 AT cameras
8-ch PoC device	8 AT cameras
16-ch PoC device	8 AT cameras + 8 AF cameras Or up to 12 AT cameras

16-ch PoC device is connected to 8 AT cameras through 8 random channels rather than fixed ones. The access scenarios of a 16-ch PoC device are listed in the table below:

AT camera access	12	11	10	9	8	N (0 to 7)
AF camera access	0	2	4	6	8	16-N

Distributed by




#### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 [10] 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33[0]1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com

04701102020118