


# PRODUCT LEAFLET






Enclosed addressable manual call point with isolator 4439

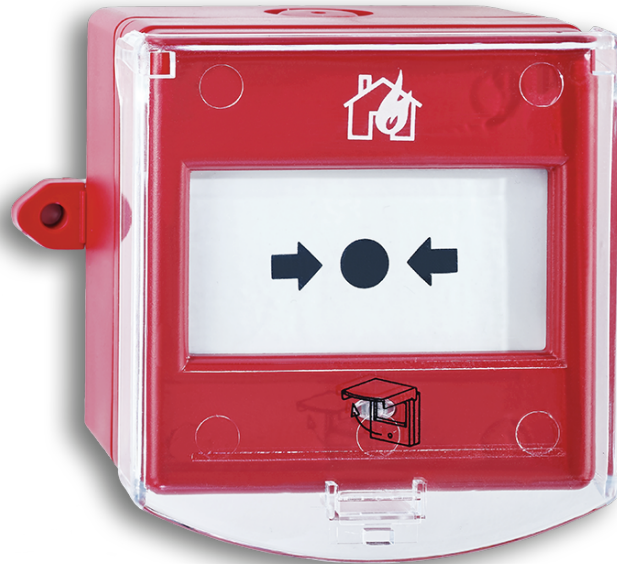

## FEATURES

- IP 66 for use outdoor or in humid areas.
- Polycarbonate flap to protect against accidental operation
- Built-in short-circuit isolator
- Configurable polling LED on the front

## DATA

-  - 25 to +70 °C
-  < 90%
-  87x87x66mm
-  237g
-  IP66

## GENERAL

- Tested and approved according to EN54-11 and EN54-17
- VdS Approval: G 213005
- CPD: 0786-CPD-21236

## RELATED PRODUCTS

- 2347 - Replacement glass (10 pcs)
- 2348 - Replacement polycarbonate flap (10 pcs )