


CODE: **AWO200K** v.1.1/III  
 NAME: **Enclosure 17/TRP50/DSPR/L/**  
**two-level**

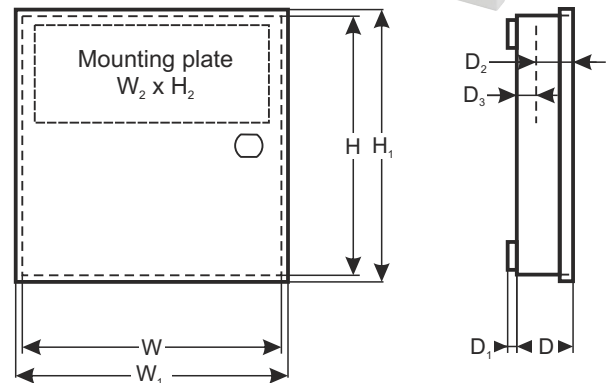

## APPLICATION

**DSC:** (PC 1616, 1832, 1864, 4020) + 3x 5108 (4108, 5208, 5100, 4116)

**MODULES:** (PC 5204, 5400, 5200, 5580, 4216, 4204) + 3x (5108, 4108, 5100, 4116, 5208)

**PARADOX:** (E55, E65, 728ULT, EVO48, EV0192, SP4000, SP5500, SP6000, SP7000) + 2 x Z X 8 (Z X 4, APR3-ADM2, APR3-HUB2, PGM4)

**RISCO:** PRO24, 116, 128, 140+ RP296EPS+ EZ16 (E04, EZ8)

**SATEL:** CA4V1, CA5, CA6

(VERSA5, 10, 15, CA10) + CA10E (CA64E, SM, MST1)

(INTEGRA24, 32) + CA64E (SM)

**MODULES:** CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VGM- 16, SR, PTSA) + CA64E (SM)

**COMMUNICATION MODULES:** GORKE – ATG

ROPAM – BASIC and MULTI GSM

SATEL – ETHM, GSM LT1, LT2, GPRS-T1/T2/T4

**PYRONIX:** MATRIX 424, 6, 816, 832, 832+

**TEXECOM:** PREMIER 412, 816, 832, 48, 88, 168, 640

**TELMOR:** TCA- 824 + TEX800+ TMT1

**ROGER:** PR402, CPR 32-SE

**EBS:** PX 202A

**PULSAR:** MS1012, MSR1012, MSRK1012

MS2012, MSR2012, MSRK2012

## TECHNICAL PARAMETERS

**External dimensions of the enclosure:**  $W=350, H=435, D+D_1=140+8$  [+/- 2mm]

**External dimensions of the front panel:**  $W_1=355, H_1=440$  [+/- 2mm]

**Mounting plate dimensions:**  $W_2=310, H_2=135$  [+/- 2mm]

**Working depth 1/2:**  $D_2=62, D_3=75$  [+/- 2mm]

**Weight net/gross:** 6,30kg / 7,0kg [+/-0,1kg]

**Space for battery:** 17Ah/12V Sealed Lead Acid (SLA)

**Transformer:** TRP 50VA/16V/18V/20V in enclosure PC/ABS class UL94-V0, IP30

**Supply:** 230V/AC (-15%/+10%), 50Hz, 250mA (max.)

**Power output:**  $U_1=16V/AC$  or  $U_2=18V/AC$  or  $U_3=20V/AC$ (-5%,+15%),  $I_1=3,0A$  or  $I_2=2,8A$  or  $I_3=2,5A$ (max.)

**Operating environment:** class II, -10°C+ 40°C

**Material description:** sheet metal DC01, 0,7mm thick, rust protection, colour: RAL 9003

**Destination:** Indoor

**Tamper protection:** 1 x microswitch: opening enclosure, 0,5A@50VDC max. NC- normally closed contacts

**Closing:** screwed x 2

**Notes:** lock assembly possible, distance from the wall (mounting surface) - 8mm

**Declaration, warranty:** CE, 2 year from the production date