
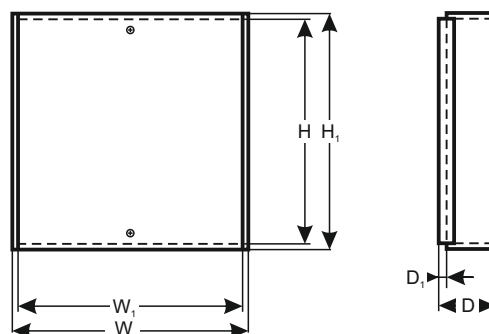


CODE: **AWO229** v1.2/IV
 NAME: **Enclosure 17/EXP/SAT/GRADE 3**

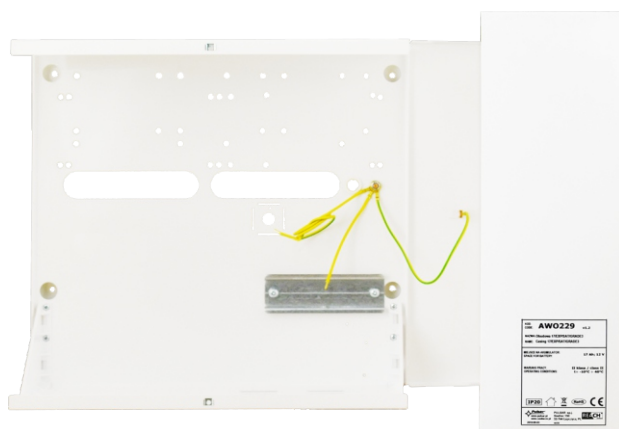

APPLICATION

1. Modules:

SATEL: INT-E, INT-PP, ACCO-NT, ACCO-KP, ACCO-KPWG, ACCO-KP-PS, ACCO-KPWG-PS.

2. Buffer power supply units:

SATEL: APS-412, APS-612.

PULSAR: PSB251215, PSB351225, PSB501235, PSB751250.

TECHNICAL PARAMETERS

External dimensions of the enclosure:	W=330, H=305, D=120 D ₁ =15 [+/- 2mm]
External dimensions of the front panel:	W ₁ =325, H ₁ =310 [+/- 2mm]
Weight net/gross:	3,15kg / 3,40kg [+/-0,1kg]
Battery space:	17 Ah/12 V Sealed Lead Acid (SLA)
Operating environment:	2nd environmental class, -10°C÷ 40°C
Material description:	sheet steel DC01, thickness: 1,0mm, corrosion protection, color: RAL 9003
Destination:	indoor
Tamper protection:	enclosure is equipped with set including mounting bracket with tamper
Closing:	screwed x 2
Notes:	distance from wall (mounting surface) - 15mm, "C"-shaped doors and the bottom of the casing, no hinges
Declaration, warranty:	RoHS, in accordance with the EN50131 standard, Grade 3 2 year from the production date